



WiFi PIR Motion Sensor

USER MANUAL

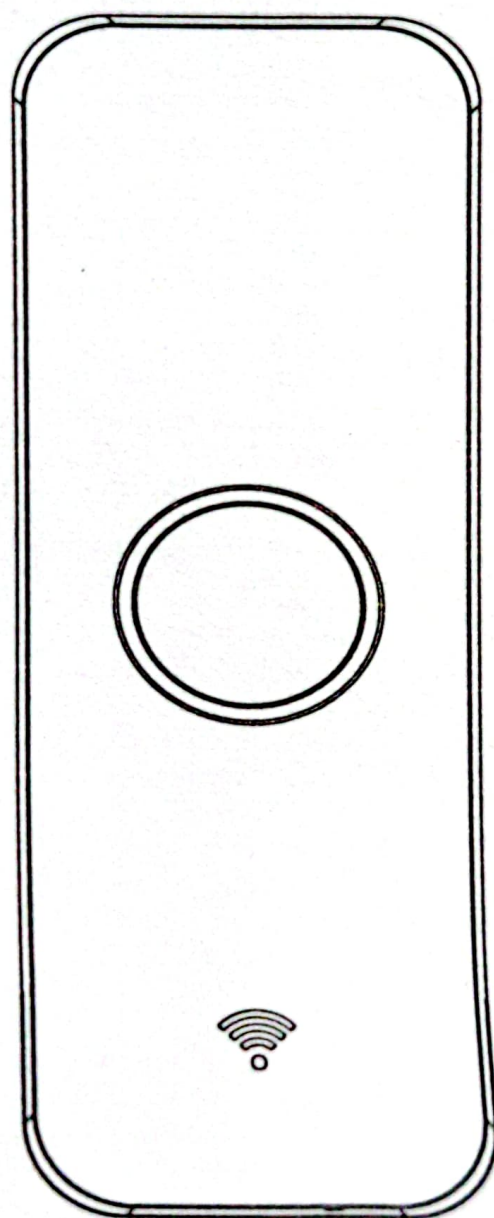


Model: P01


Product Presentation:

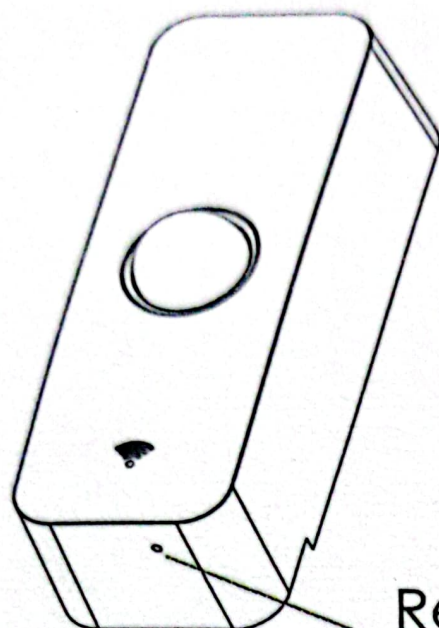

Reset button hole
(use S/S pin to press)

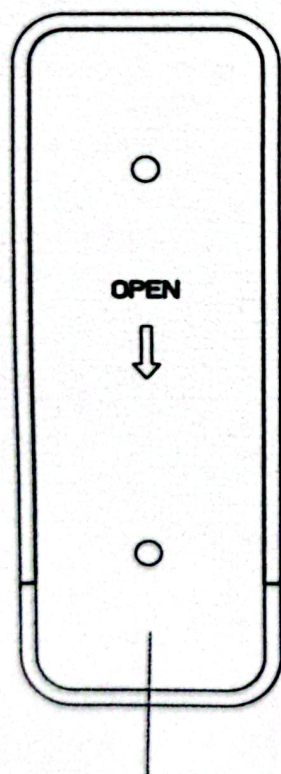

Battery Cover

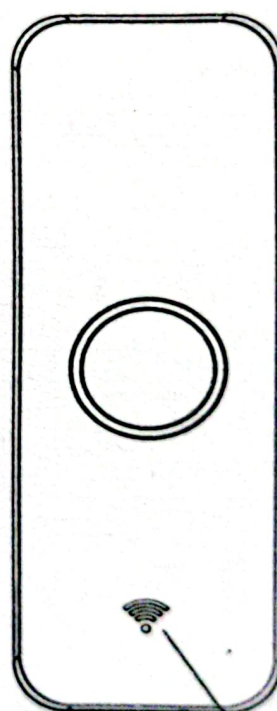

LED Indicator

Specification

Size: 71*25*20mm

Battery: LR03-1.5V/AAA*2 (Alkaline battery)

Wi-Fi Standard: 2.4GHz

Wi-Fi Frequency: IEEE 802.11b/g/n

Standby Current: 22uA


Alarm Current: $\leq 45\text{mA}$

Detect Angle: 128°

Detect distance: ≤ 6 Meters

How to use:

Slide downwards to open back cover of battery compartment, install 2pcs AAA Alkaline batteries in the right direction of electrode, the indicator will blink, then push to close the cover.

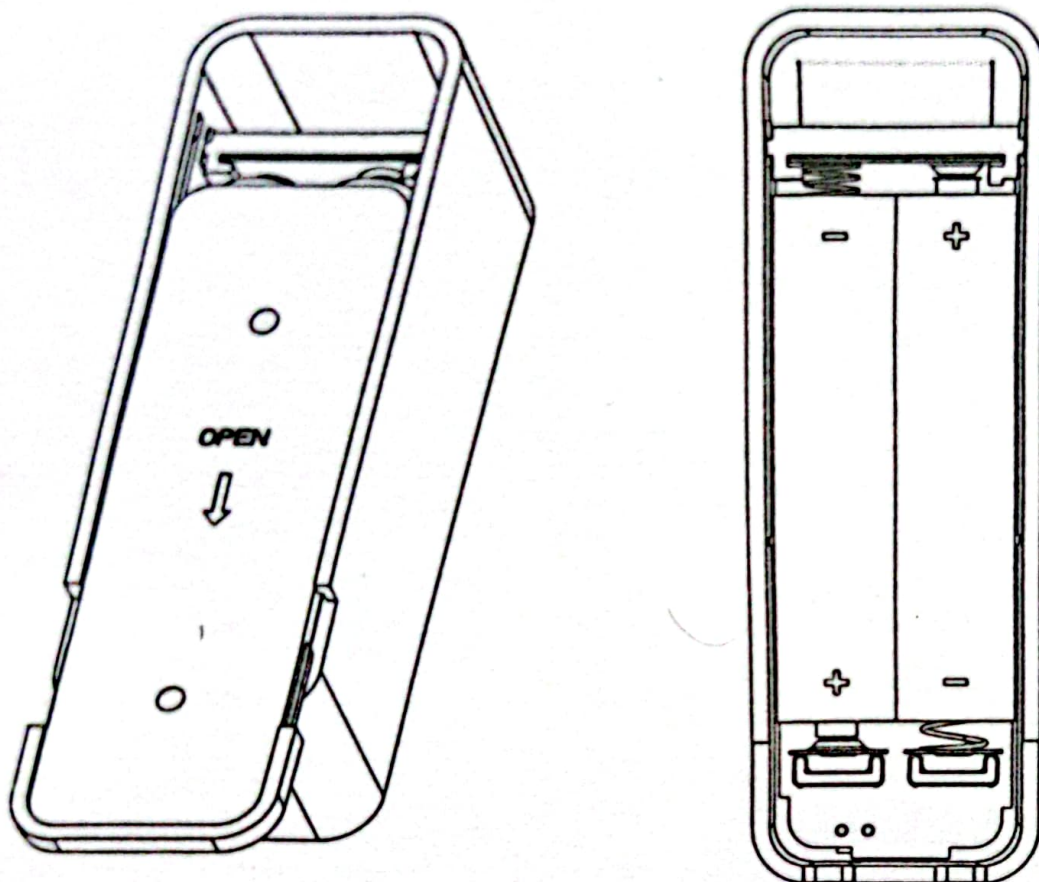

(Notes: when batteries are run out, please choose Alkaline battery instead of Carbon-zinc battery.)

How to set up:


1. Use your smartphone to scan QR code, or search "Smart Life" app in Google Play Store or APP Store to download and install.




Smart Life




QR Code

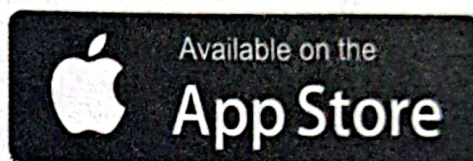

2. Create an account with your mobile number and authentication code.




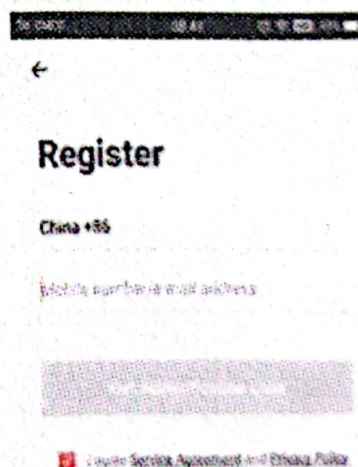


3. Connect your mobile to the Wi-Fi router, click "Add Device" . Make your zigbee gateway ready, and supply power to the gateway.

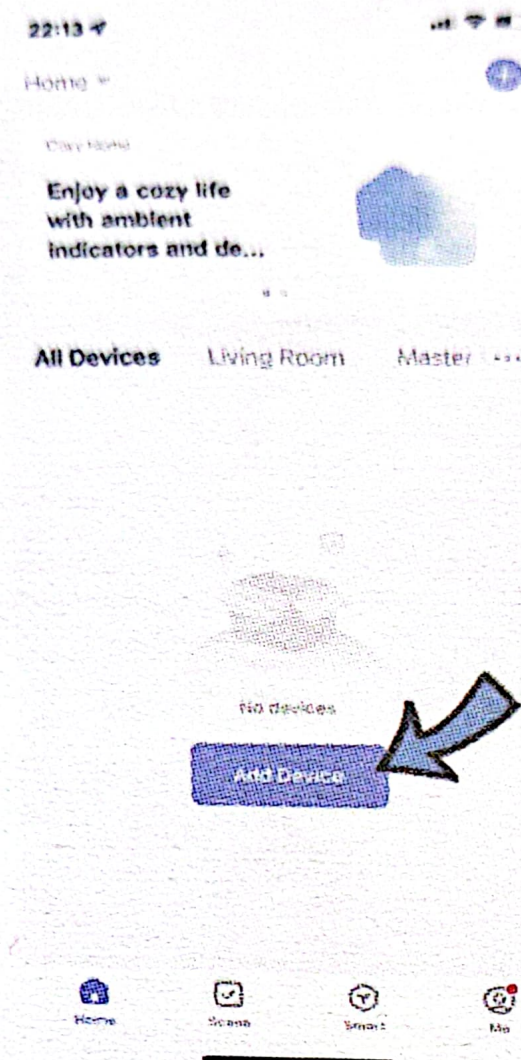


4. 1) Bluetooth Mode:

The app advises you to turn on the bluetooth in your mobile, enter wifi name and password, it will search nearby device, and connect the motion sensor automatically.

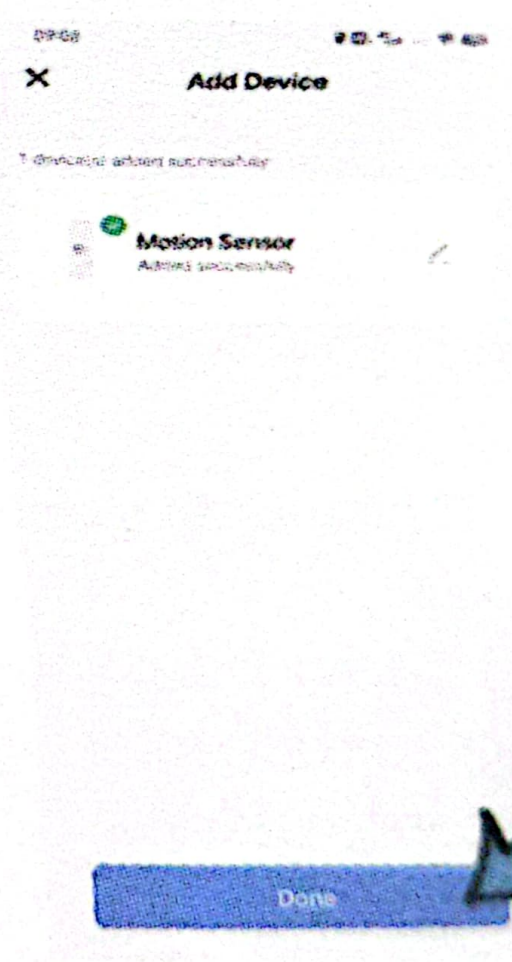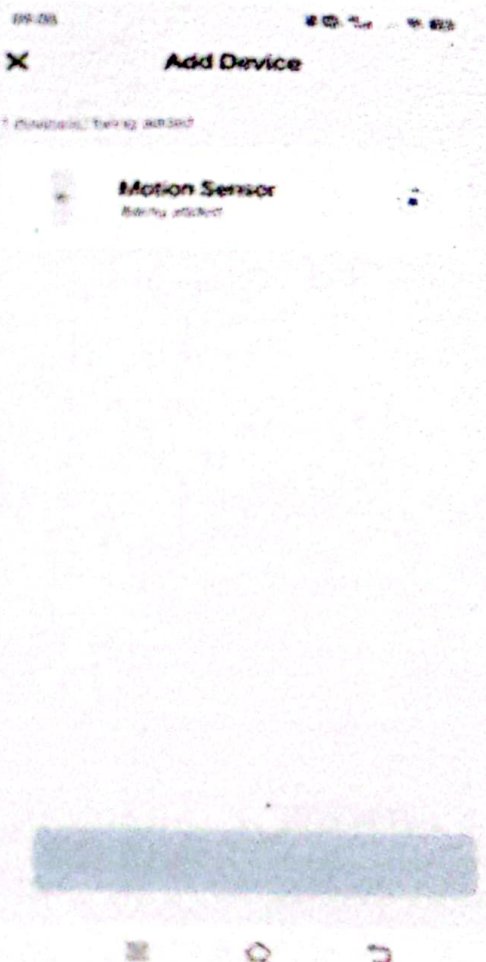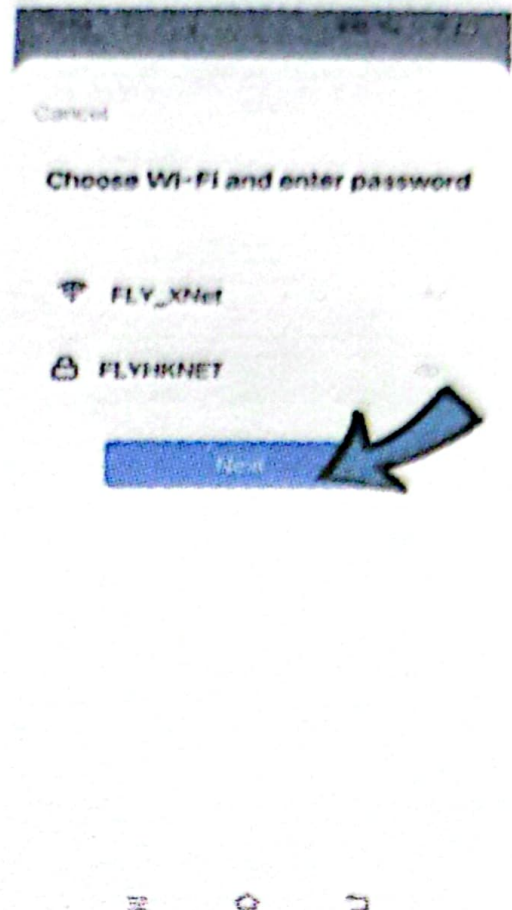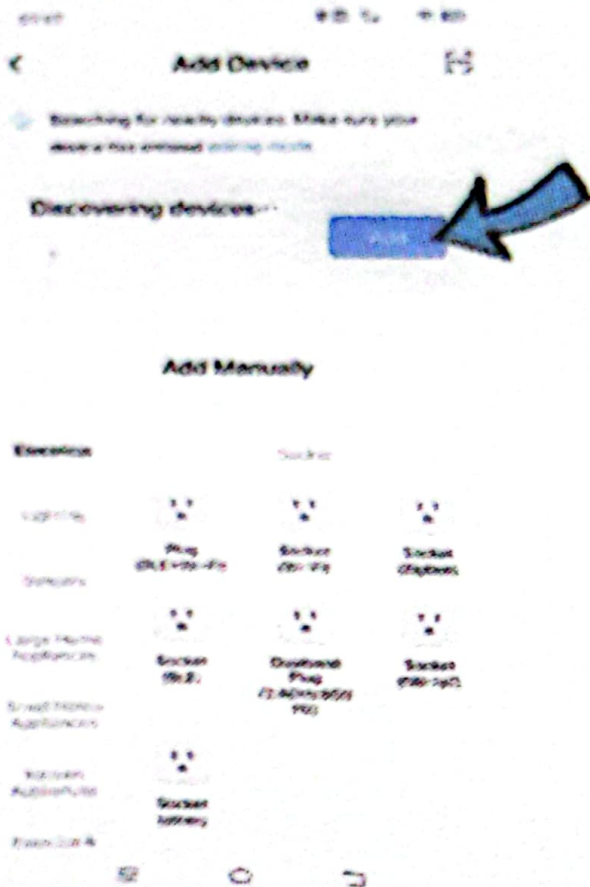

2) Blink Quickly:

Select "Motion Detector (Wi-Fi)" from "Sensors", enter wifi name and password, Select "Blink Quickly", make sure the LED indicator is blinking quickly, if not, use the supplied S/S Pin to press the reset button till indicator is blinking quickly.

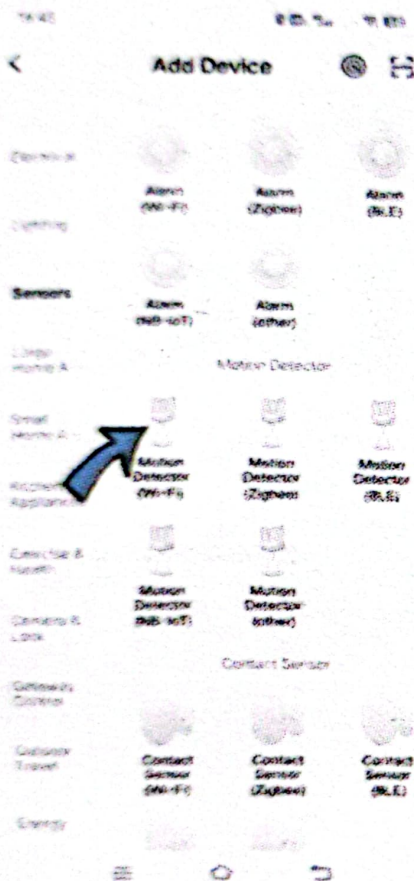


Reset the device



Press and hold the RESET button for 5 seconds until the indicator blinks (subject to the user manual).



Confirm the indicator is blinking

Reset Device Step by Step

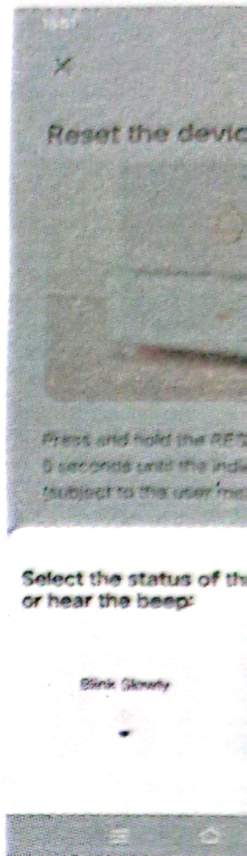


3) Blink Slowly

You can also use the supplied S/S pin to press the LED indicator button slowly. Connect the device to a hotspot: "Smart Home" App interface configuration



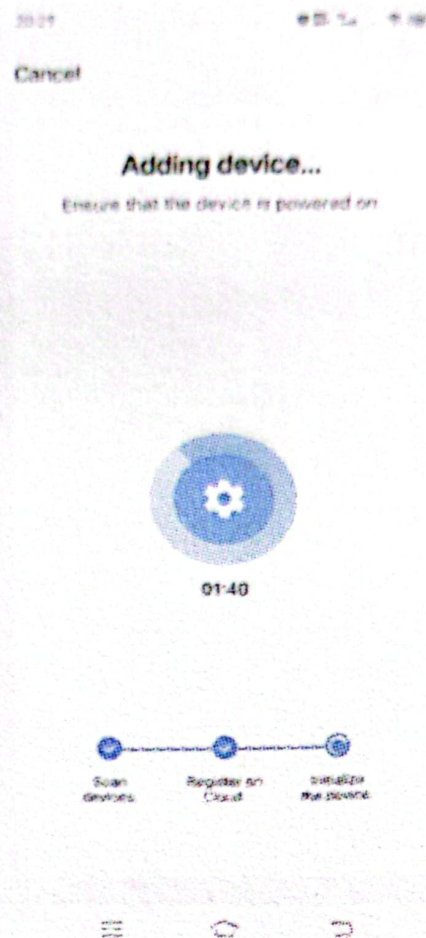
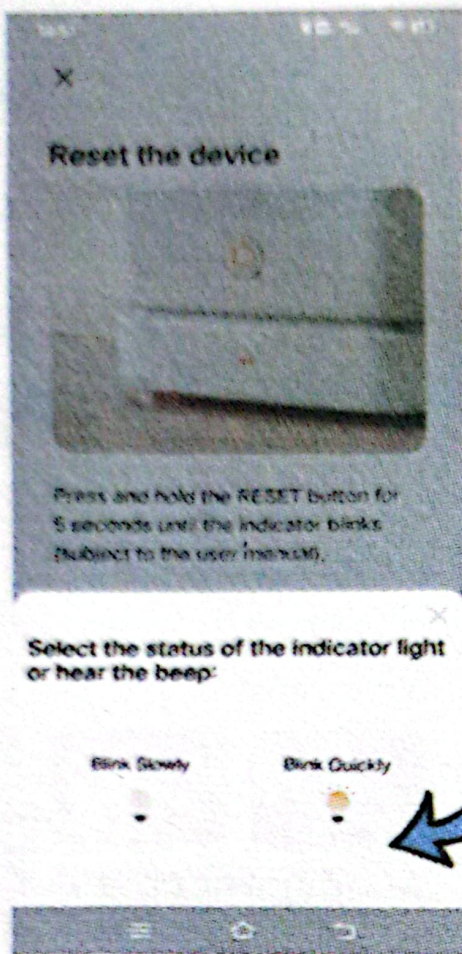


3) Blink Slowly:

You can also select "Blink Slowly", make sure the LED indicator is blinking slowly. if not, use the S/S pin to press reset button till the indicator is blinking slowly. Connect your mobile to the device's hotspot: "SmartLife-XXXX" , then click to return to App interface , it will connect automatically, configuration completed.

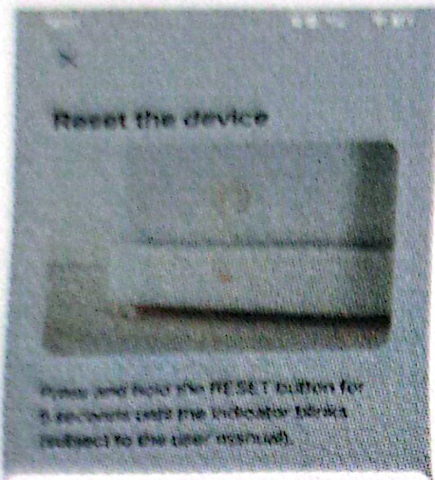

Select the status of the Indicator light or hear the beep:

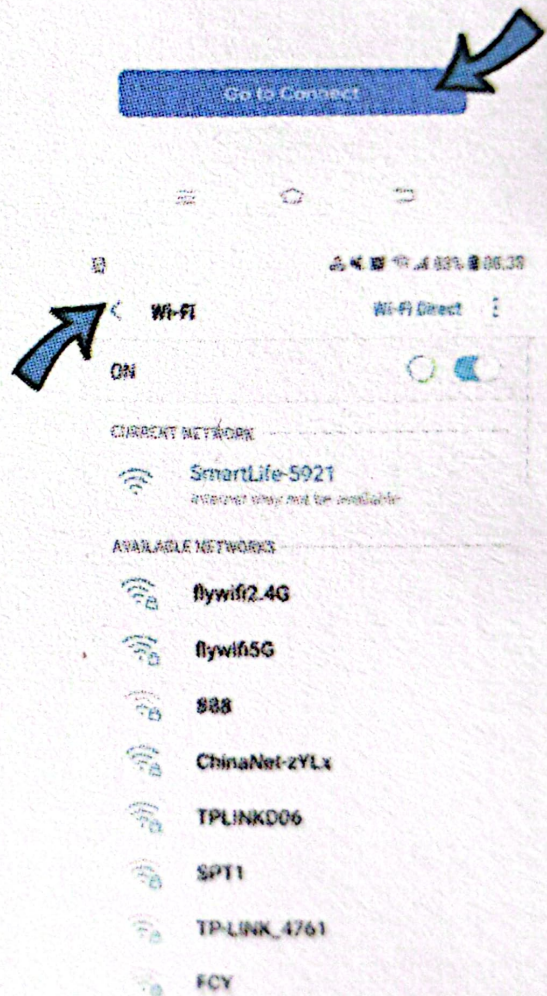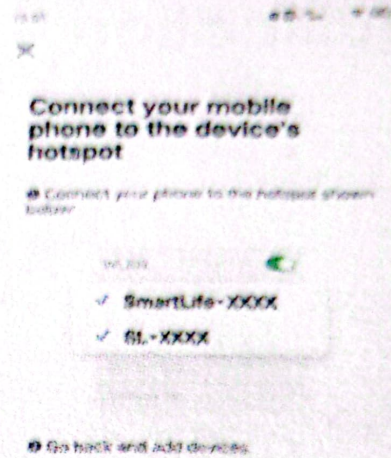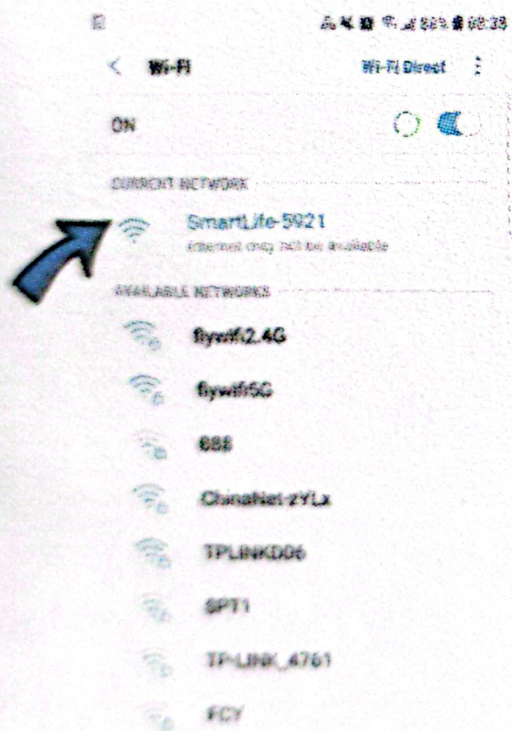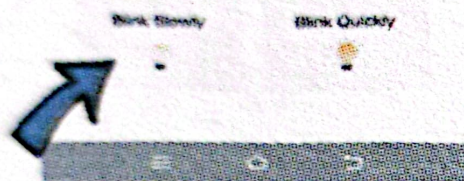

Functions

1. Alarm alert

When the sensor detects someone is passing by, you will receive alarm message on your mobile.

2. Alarm records

You can check all alarm records in the app, so you will not miss any important moments.

3. Low power alarm

When the battery power is low, the app will alert you to replace with new batteries.

4. Device sharing

Share your added sensors with family members, so they can also monitor the status on their App.

5. Scene linkage

You can set scene linkage with other tuya smart devices such as light. When it detects someone is passing by, the light will turn on automatically.

FAQ

1. If you use the motion sensor the first time, it will alarm when the sensor detects body movement. And there will be about 30s time interval to alarm after you leave the detect angle or detect range, then pass by again.

2. The motion sensor is vulnerable to interrupt by heat or light sources, the infrared radiation of human body is easy to be sheltered due to poor penetration, so the detector is hard to receive the infrared.

3. The motion sensor is vulnerable to interrupt by RF radiation. When environment temperature is close to human body temperature, the detect sensitivity will decrease obviously, making sensor short-term failure sometimes.