

Features:



- ※ Rimless design with magnetically-attached grille.
- ※ 2-way coaxial sound system with professional crossover.
- ※ 6.5" woven cone woofer.
- ※ 1" silk dome tweeter.
- ※ 100V or 70V distributed speaker lines, or in 8 ohm direct mode.
- ※ Adjustable knob to select input mode and various power outputs .
- ※ Attractive color ABS resin finish with white grille suits any decor.




Specifications:

Model	T-208F		
Input Mode	70V	100V	8 Ω
Power Taps	2=1.88W 3=3.75W 4=7.5W 5=15W 6=30W	2=3.75W 3=7.5W 4=15W 5=30W 6=N.C.	1=30W
● DO NOT USE IN POSITION 1(8Ω) ON A 70V/100V SYSTEM, OR DAMAGE WILL OCCUR. ● DO NOT USE IN POSITION 6(N.C.) ON A 100V SYSTEM, OR DAMAGE WILL OCCUR.			
SPL(1W/1M)	90 dB		
Freq. Response	70-20KHz		
Woofer Driver	woven cone 6.5"*1		
Tweeter Driver	silk dome 1"*1		
Material	ABS enclosure, metal grille and clamps		
Cutout Size	Φ205mm		
Dimension	Φ235*101mm		
Finish	White		


Dimension:




Installation Steps:

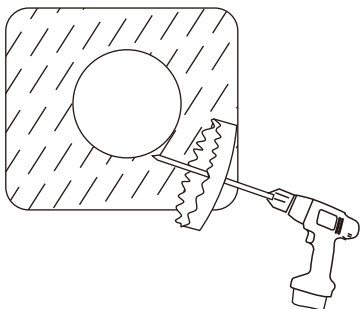


① Cut Ceiling Hole




- Connect signal wiring at the left tap.
- Connect COM wiring at the right tap.



② Connect Wiring



③ Tighten the fastening screws in a clockwise direction.

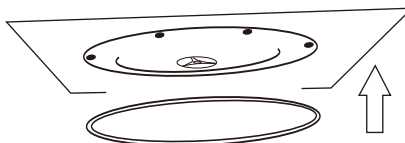

④ Attach the grille.