


Volume Control

T-671 T-672 T-673 T-674 T-675

Volume Control with Relay

T-671F T-672F T-673F T-674F T-675F

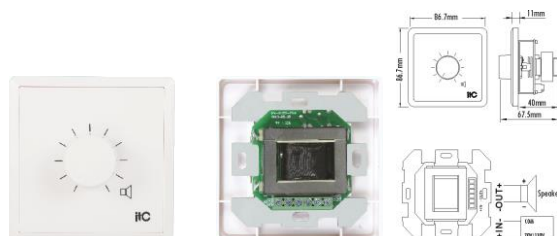

Model	T-671	T-672	T-673	T-674	T-675
Input Power	6W	15W	30W	60W	100W
Control Mode	Transformer	Transformer	Transformer	Transformer	Transformer
Signal Input	70~100V	70~100V	70~100V	70~100V	70~100V
Signal Output	0~100V	0~100V	0~100V	0~100V	0~100V
Speaker Type	Voltage Speaker	Voltage Speaker	Voltage Speaker	Voltage Speaker	Voltage Speaker
Frequency Response	80-16KHz	80-16KHz	80-16KHz	80-16KHz	80-16KHz
Relay	/	/	/	/	/
Step	11 Steps	11 Steps	11 Steps	11 Steps	11 Steps
Finish	PC, white	PC, white	PC, white	PC, white	PC, white
Mounting Size	81 x 81 x 50mm	81 x 81 x 50mm	81 x 81 x 50mm	81 x 81 x 50mm	81 x 81 x 50mm
Dimension	86.7 x 86.7 x 67.5mm	86.7 x 86.7 x 67.5mm	86.7 x 86.7 x 67.5mm	86.7 x 86.7 x 67.5mm	86.7 x 86.7 x 67.5mm
Weight	0.14Kg	0.20Kg	0.20Kg	0.20Kg	0.22Kg
Accessory	One pair screw of M4 x 25	One pair screw of M4 x 25	One pair screw of M4 x 25	One pair screw of M4 x 25	One pair screw of M4 x 25

Model	T-671F	T-672F	T-673F	T-674F	T-675F
Input Power	6W	15W	30W	60W	100W
Control Mode	Transformer	Transformer	Transformer	Transformer	Transformer
Signal Input	70~100V	70~100V	70~100V	70~100V	70~100V
Signal Output	0~100V	0~100V	0~100V	0~100V	0~100V
Speaker Type	Voltage Speaker	Voltage Speaker	Voltage Speaker	Voltage Speaker	Voltage Speaker
Frequency Response	80-16KHz	80-16KHz	80-16KHz	80-16KHz	80-16KHz
Relay	With DC24V Relay	With DC24V Relay	With DC24V Relay	With DC24V Relay	With DC24V Relay
Step	11 Steps	11 Steps	11 Steps	11 Steps	11 Steps
Finish	PC, white	PC, white	PC, white	PC, white	PC, white
Mounting Size	81 x 81 x 50mm	81 x 81 x 50mm	81 x 81 x 50mm	81 x 81 x 50mm	81 x 81 x 50mm
Dimension	86.7 x 86.7 x 67.5mm	86.7 x 86.7 x 67.5mm	86.7 x 86.7 x 67.5mm	86.7 x 86.7 x 67.5mm	86.7 x 86.7 x 67.5mm
Weight	0.16Kg	0.22Kg	0.22Kg	0.22Kg	0.24Kg
Accessory	One pair screw of M4 x 25	One pair screw of M4 x 25	One pair screw of M4 x 25	One pair screw of M4 x 25	One pair screw of M4 x 25