

# Serratura elettrica da applicare


Electric RIMlock

Art. 172/E | **serratura elettrica con pulsante - GRAPHITE**  
electric lock with button



- Cassa in acciaio zincato e verniciato GRAPHITE
- scrocco autobloccante
- pulsante interno apertura dx o sx (in ABS)
- cilindro interno fisso con 3 pistoncini
- cilindro esterno fisso con 5 pistoncini (2 antimanipolazione)
- 3 chiavi in ottone nichelato
- gruppo elettromagnete a bobina singola
- tensione 12V ca 15W
- collegamento dei fili al morsetto con bloccaggio rapido
- entrata mm. 60x130
- completa di incontro con rullo regolabile
- Confezione singola

- Silver zinc painted case GRAPHITE
- self-locking latch-bolt
- inner button, right or left opening (ABS)
- inner fixed cylinder with 3 small pistons
- outer fixed cylinder with 5 small pistons (2 picking resistant)
- 3 brass keys Nickel pl.
- single solenoid (electromagnet) unit
- voltage 12V ac 15 W
- wire connection to terminal with quick locking
- entrance mm. 60x130
- complete of striking with adjustable roller
- Single box

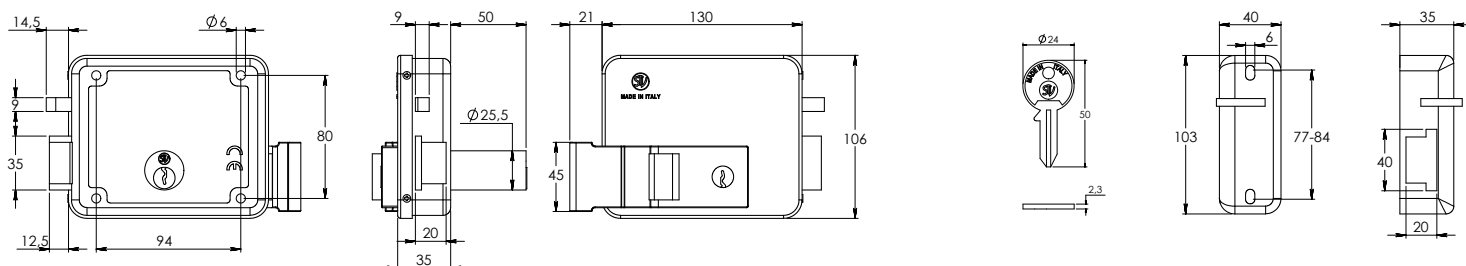

a richiesta completa del tettuccio zincato: Art. 178  
a richiesta disponibile con 2 bobine

on demand cover protection: see Art. 178  
on demand with double solenoid

