


LED EMERGENCY LIGHT

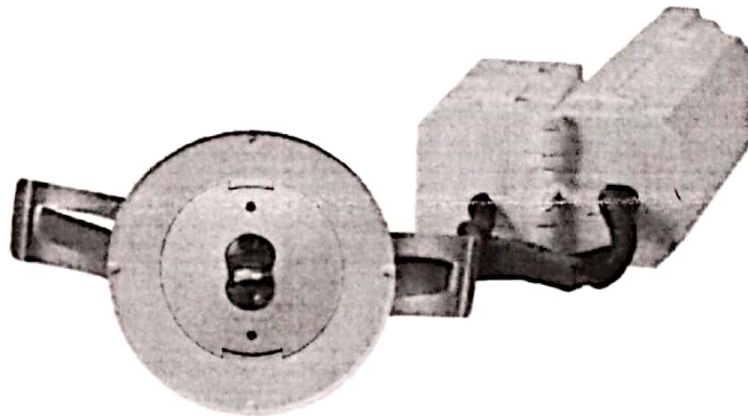

HD-49004

SPECIFICATIONS

- **Fitting:** Plastic
- **Class:** Class 2
- **IP Rating:** IP 20
- **Voltage:** AC220-240V 50/60Hz
- **Dimensions:** 202mmx35mmx30mm
- **Lamp Type:** 3W SMD LED
- **Battery:** 3.7V2200mAh battery
- **Charging time:** 24hrs
- **Duration time:** 3hrs
- The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire should be replaced, or the light source should only be replaced by the manufacturer.

HOW TO OPERATE

1. The lamp is used as an emergency lamp.
2. please make sure electricity cut off before operation
3. Cutting hole size $\varnothing 45-50$ mm.
4. Connect battery plug into driver socket.
5. Unscrew the screw in the driver cover.
6. Use 0.75mm² AC wire and connect according to printing on the PCB. Make sure L,N,K correct connected.
7. Connect AC wire into main electricity power. Push clips and install the lamp into cut hole.
8. Switch on main electricity power. LED indicator light become Green.