

Quick Start Guide



Of Professional HD IP Cameras V2.1

More information can be downloaded at www.ipcam.xin

This manual is applicable to professional types of IP cameras such as:

Bullet HD IP cameras

Dome HD IP cameras

PTZ HD IP cameras

Recommended to download the CD information on www.ipcam.xin

before operation.

Please according to the order of the content to operate.

Content

1. About camera	3
2. Connect your camera	4
3. View via mobile phone	5
4. View via PC	6
5. Set WIFI	8
6. Set Micro SD card records	9
7. Reboot and restore factory setting	11
8. More infos	12

1. About camera

1.1 Introduction


This is a high-definition network(IP) camera, when you install it, you can get real-time monitoring screen anytime and anywhere through mobile phones, computers or other means etc., and camera can save the video to the TF card, computer or other device such as an NVR, etc., you can also set variety of alerts such as email alarm or mobile phone message push etc., hope you like it !

1.2 Product package should contain the following items:

IP Camera*1	Power adapter*1
User manual*1	Network cable*1
WIFI Antenna*1	Screws bag*1




1.3 Interface.

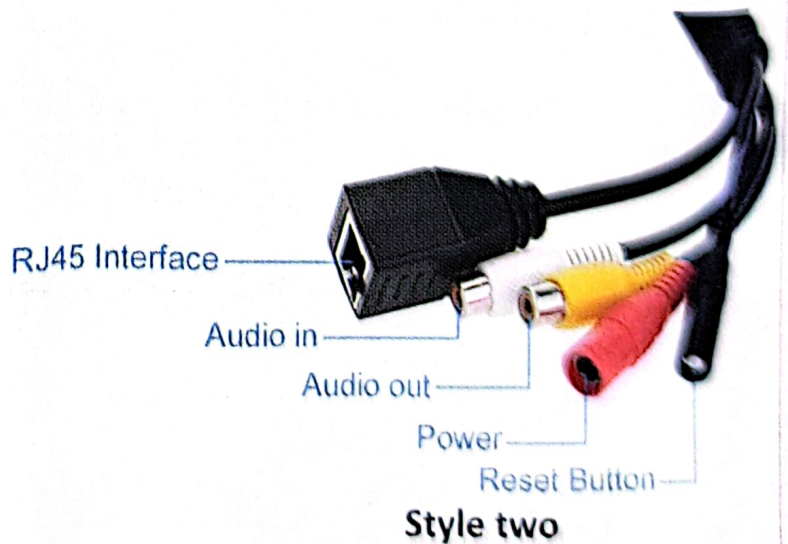

2. Connect your camera


2.1 Connect network cable to router and plug in power adapter.

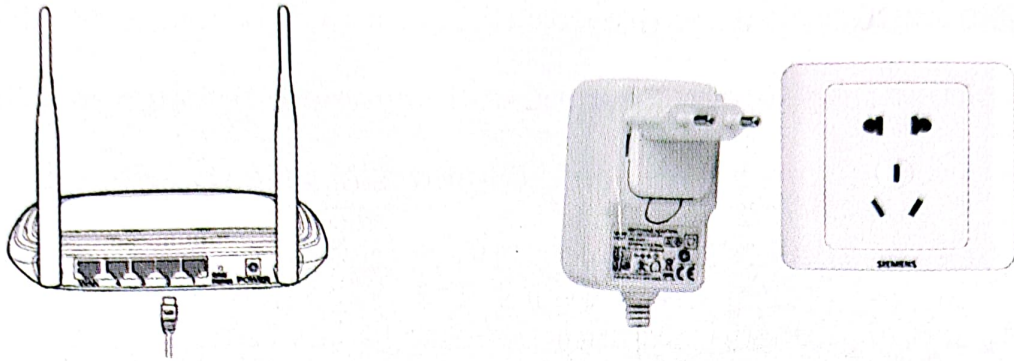

The router must be able to connect to the Internet!

Please use the standard power supply.

2.2 Connect LAN cable and power to camera, camera need about 1minute to self checking and then start working.

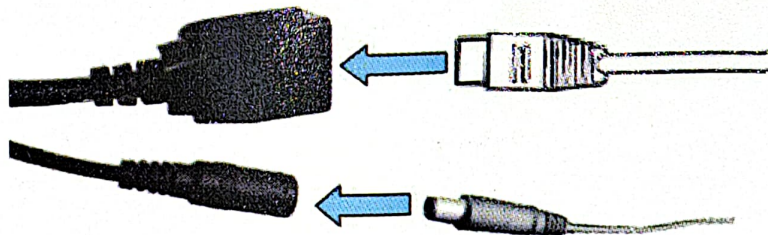

Network indicator light (green): always flashing means network data transmission is normal.


If you do not want to use the network cable to start the camera, please read the operating document "**How to use the AP mode of the camera**" in the CD information.

3. View via mobile phone

3.1 Download "CamHi" from Google Play Store / Apple App Store or scan the QR code below to get APP information.




Android

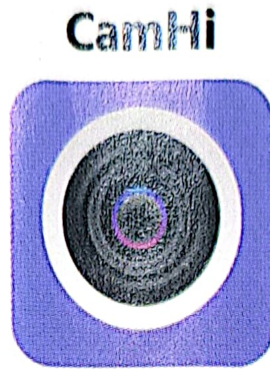

IOS


3.2 Run APP and Click "Add Camera" to enter the camera's UID.

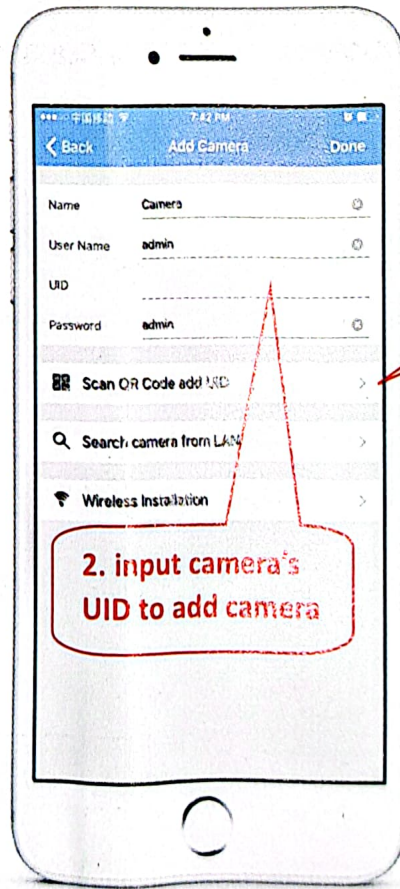

Can quickly enter UID by scan QR code on the label




3.3 Add camera complete, click online camera to view real-time image.

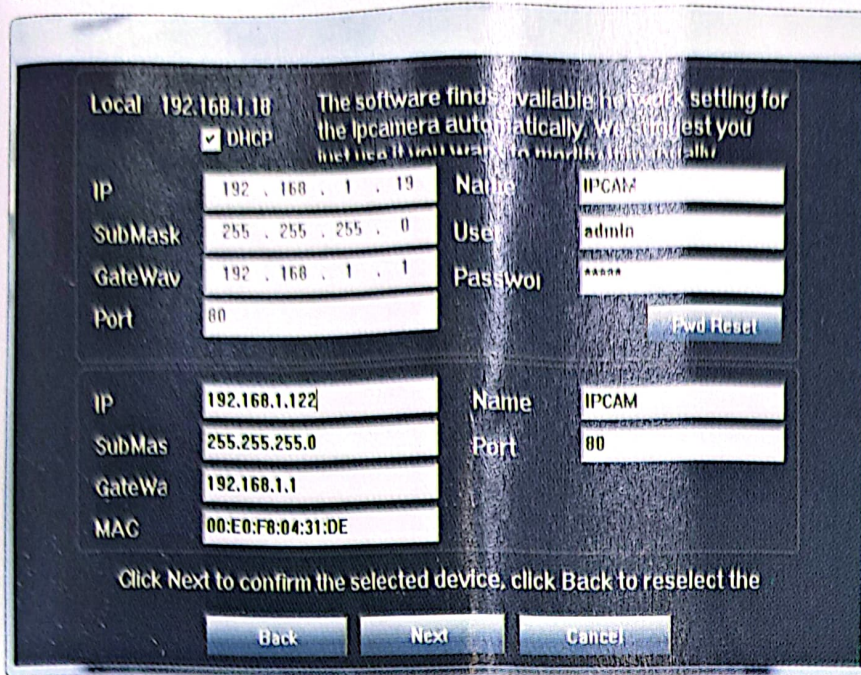

Default user name:
admin
Default password:
admin

4.2 Access to the camera through browser on windows PC.

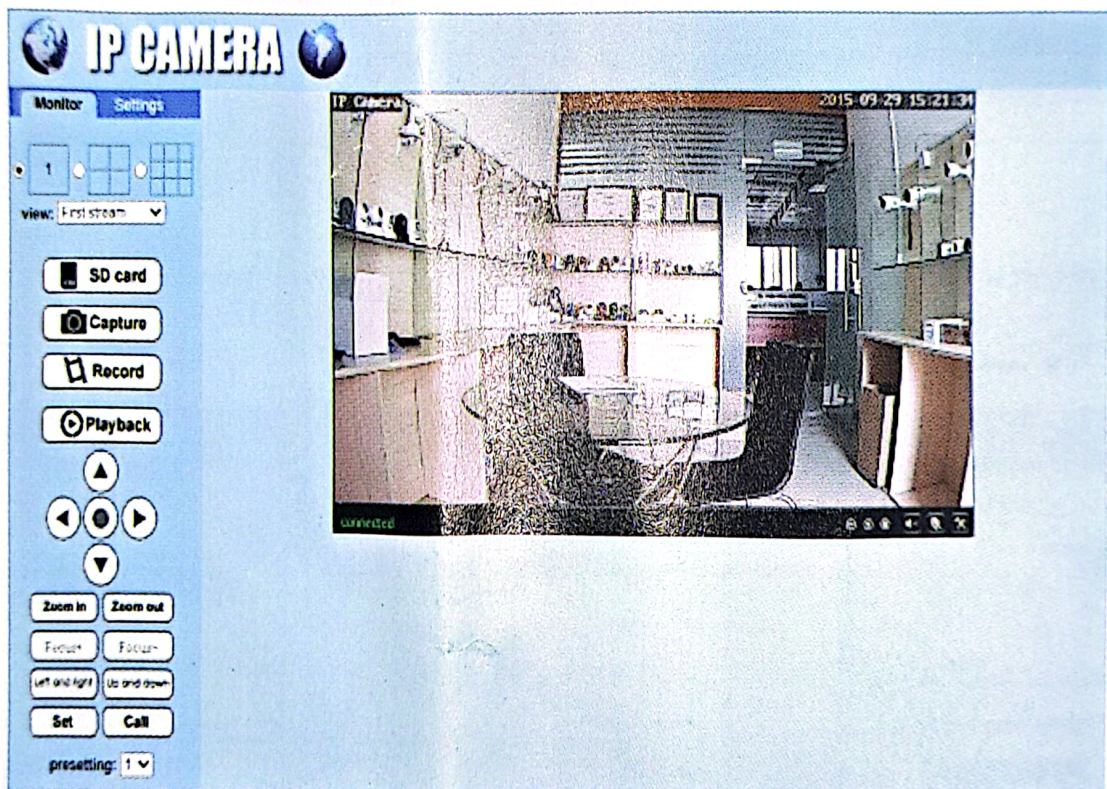

In browser you can view image and configure all parameters of camera.
if you are not using IE browser some settings will not be visible!



4.3 Manage the multiple cameras via CMS on windows PC!



Also you can find the installation files and instructions in the CD information.

5. Set WIFI

5.1 Set WIFI on phone.

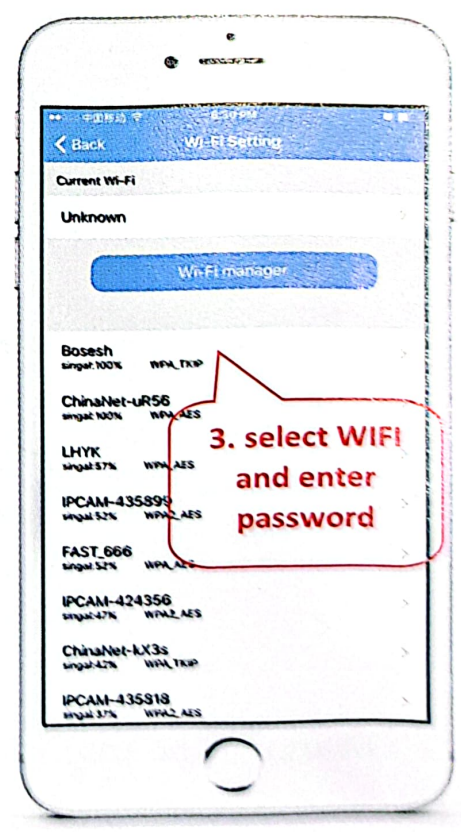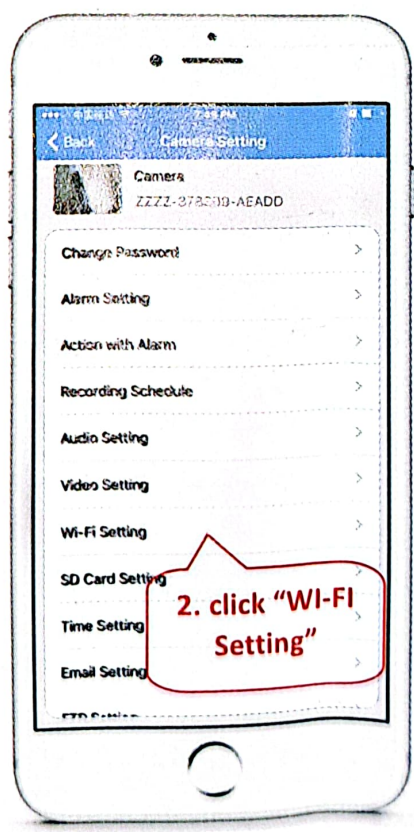

5.2 Set WIFI via browser on PC.

The screenshot shows a web interface for configuring wireless settings. The interface includes the following elements:

- Wireless** section with an **Enable Wireless** toggle set to **On** (labeled "1 open").
- An **SSID** input field containing "SSID" (labeled "2 search").
- A **Mode** dropdown menu set to **Infrastructure**.
- A note: "(Select Infrastructure mode if using wireless router.)"
- A **Security mode** dropdown menu set to **WPA-PSK**.
- A **WPA Algorithm** dropdown menu set to **TKIP**.
- Key** and **Re-type key** input fields, both containing masked characters (labeled "4 input password of the wireless router").
- A **Check Wireless Setup** button labeled **check**.
- A table of available wireless networks:

Action	RSSI	SSID	Encrypt	Auth
Join	-45	linksys	AES	WPA(2)-PSK

Below the table is a **refresh** button (labeled "3 choose router SSID").


At the bottom, there are **Apply** and **Cancel** buttons (labeled "5 click 'apply' save setting").

WIFI name must be English and can not contain special characters.

Camera will automatically connect to WIFI when network cable is not inserted.


6. Set Micro SD card record

6.1 Find out tutorials from the CD How to install Micro SD card to camera.

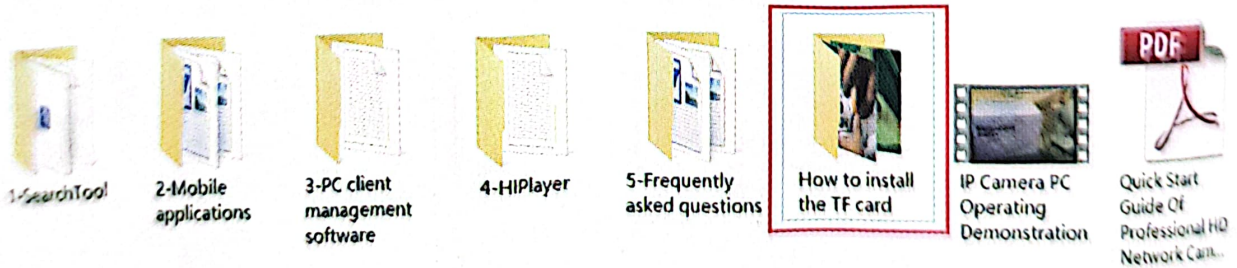


6.2 Set alarm recording on phone.


Quick Start Guide

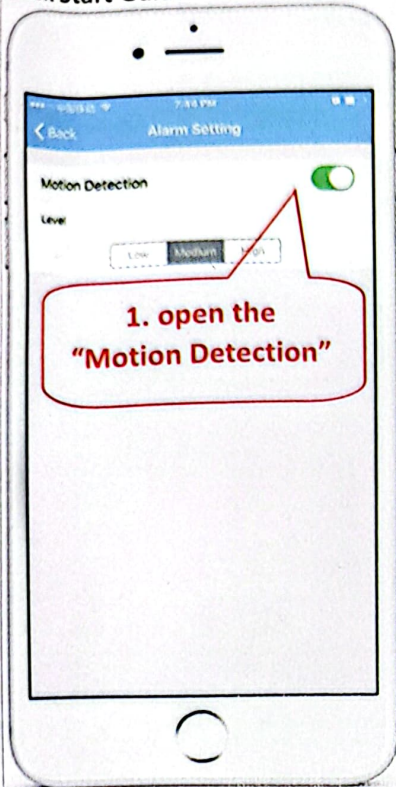

1. open the
"Motion Detection"

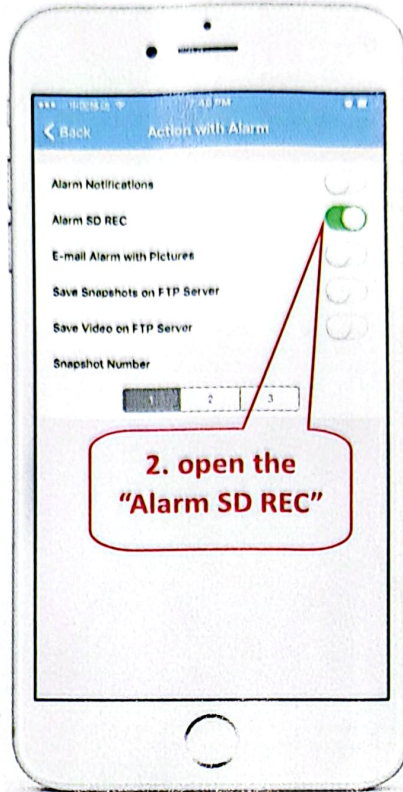


2. open the
"Alarm SD REC"

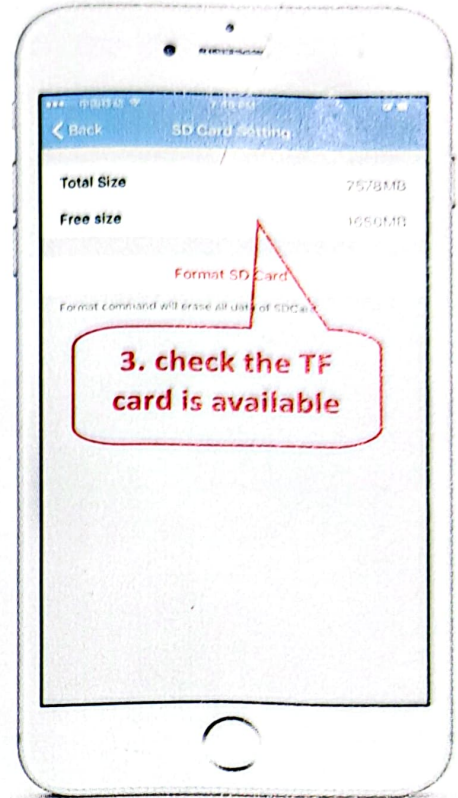


3. check the TF
card is available

Motion detection alarm recording is better when the Micro SD card is small.

6.3 Set schedule recording on phone.


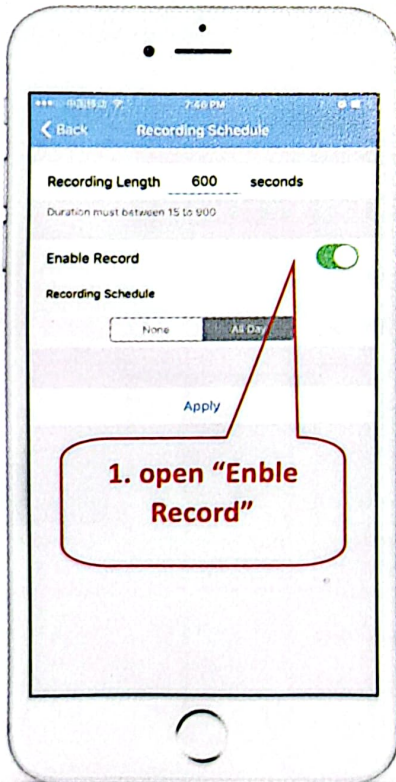


1. open "Enable
Record"

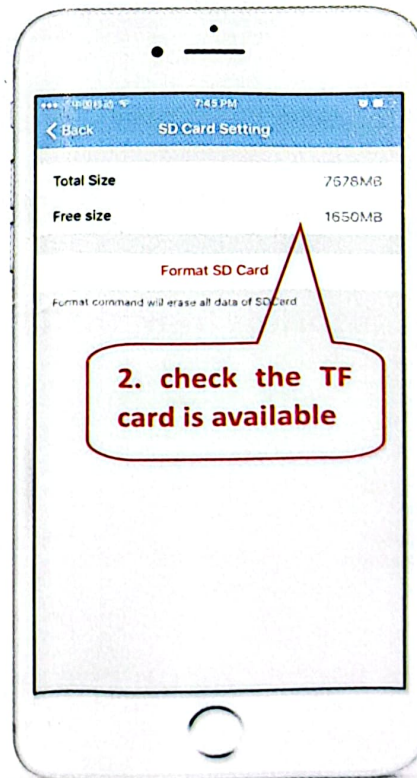

2. check the TF
card is available


6.4 Playback record on phone.

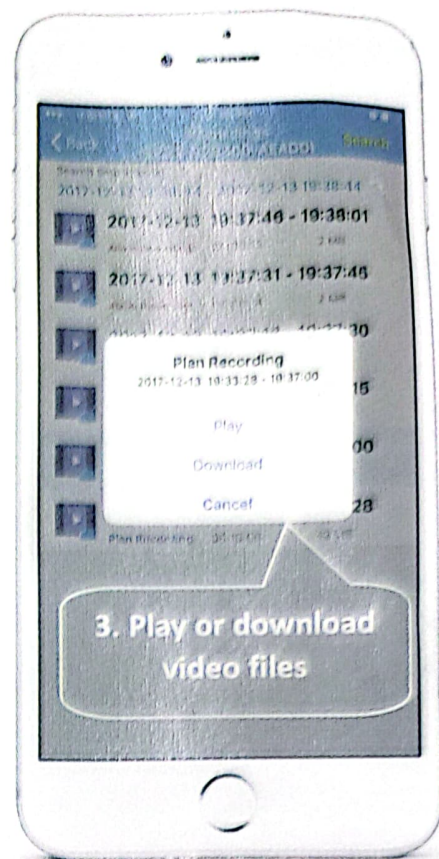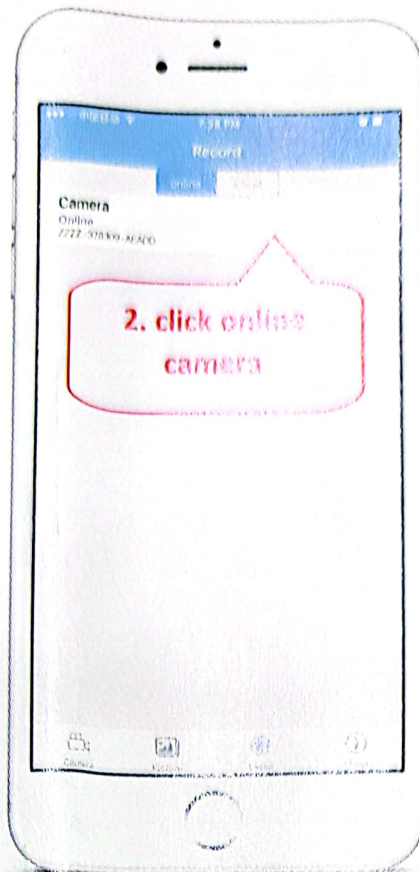

These parameters can be set in more detail via IE browser on the PC!

7. Reboot and restore factory settings

7.1 Reconnect the power to restart the camera.

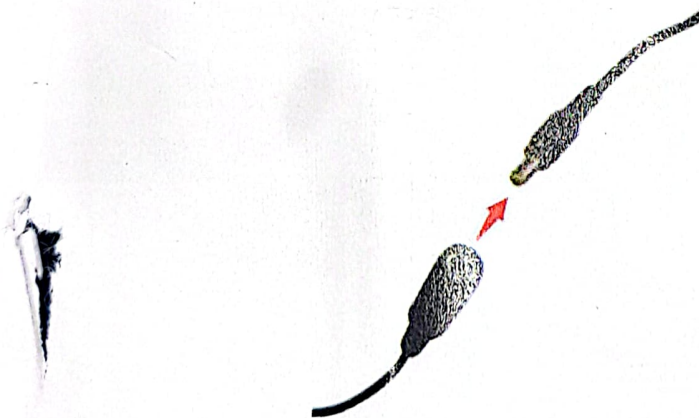

7.2 Press and hold the reset button for 15 seconds and the camera will

reboot and restore to factory settings.



Also you can restart or reset the camera on mobile phone or PC.

8. More info

This manual is to help customers get started quickly using the camera, Further information, detailed manuals and Video tutorials please refer to the content in CD information on www.ipcam.xin.

This manual may contain areas where product descriptions and operations do not match, If you have any questions or need technical support Please feel free to contact us or ours dealers.