

# DS-E04HGHI-D 4-ch 1080p Lite 1U H.265 eSSD DVR

## **Key Feature**

- Powered by eSSD technology
- Deep learning based human and vehicle targets classification of Motion Detection 2.0
- Scene-adaptive bitrate control video compression
- Up to 1080p Lite@30 fps encoding capability
- Low power consumption
- Audio via coaxial cable















#### **Built-In SSD**

- Minimalist eSSD design brings low power consumption
- Integrated storage design provides the plug-and-play device use

## **Easy Installation**

- Mini size design saves installation space
- Anti-vibration design and light weight satisfy more installation conditions

## **Compression and Recording**

- Scene-adaptive bitrate control technology would precisely allocate videos in eSSD according to the actual scene
- Full channel recording at up to 2 MP Lite resolution

#### **Smart Function**

- Deep learning-based motion detection 2.0
- Smart search for efficient playback



## Specification

Motion Detection 2.0				
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels,			
	it can classify human and vehicle, and extremely reduce false alarms caused by objects			
	like leaves and lights;			
	Quick search by object or event type is supported;			
Recording				
Video Compression	H.265 Pro/H.265			
Encoding Resolution	1080p Lite/720p/720p Lite/WD1/4CIF/CIF/QVGA			
Frame Rate	Main stream:			
	1080p Lite/720p/720p Lite/WD1/4CIF@25 fps (P)/30 fps (N)			
	Note:			
	1080p Lite/720p is 15 fps by default			
	Sub-stream:			
	4CIF@15 fps; CIF/QVGA@25 fps (P)/30 fps (N)			
Video Bitrate	According to the actual scene, scene-adaptive bitrate control technology would			
	automatically allocates appropriate bitrate to ensure the stability of recording period.			
Stream Type	Video, Video & Audio			
	Note: In order to protect privacy, the device will only record video (without audio) by			
	default. If you want to record audio, you shall manually enable audio recording. For			
	operation details, refer to the user manual.			
Audio Compression	G.711u			
Audio Bitrate	64 Kbps			
Video and Audio				
	1-ch			
IP Video Input	Up to 1080p resolution			
	Support H.265+/H.265 IP cameras			
Analog Video Input	4-ch			
	BNC interface (1.0 Vp-p, 75 $\Omega$ ), supporting coaxitron connection			
HDTVI Input	1080p25, 1080p30, 720p25, 720p30			
AHD Input	1080p25, 1080p30, 720p25, 720p30			
HDCVI Input	1080p25, 1080p30, 720p25, 720p30			
CVBS Input	Support			
HDMI Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz			
VGA Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz			
Video Output Mode	HDMI/VGA simultaneous output			




Audio Input	4-ch via coaxial cable				
Audio Output	1-ch via HDMI				
Synchronous playback	4-ch				
Network					
Total Bandwidth	64 Mbps				
	Incoming bandwidth: 4 Mbps				
Remote Connection	32				
Network Protocol	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS				
Network Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface				
Auxiliary Interface					
Capacity	Built-in 512 GB eSSD (480 GB available)				
	Note:				
	The device can store about 4 weeks videos for 4-ch analog cameras (default parameters),				
	this estimation is for reference only.				
USB Interface	Rear panel: 2 × USB 2.0				
Alarm In/Out	N/A				
General					
Power Supply	12 VDC, 1 A				
Consumption	≤ 5.4 W (with eSSD)				
Working Temperature	-10 °C to 45 °C (14 °F to +113 °F)				
Working Humidity	10% to 90%				
Dimension (W × D × H)	151 × 121 × 46 mm (5.94 × 4.76 × 1.81 inch)				
Weight	≤ 0.5 kg (with eSSD, 1.1 lb.)				

### Note:

Analog and IP signal input types are not configurable, and analog channel cannot be disabled to increase the maximum accessible number of network cameras.



## **Physical Interface**

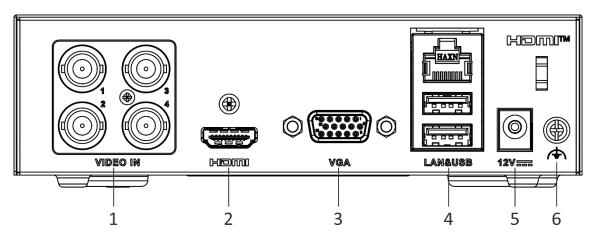

No.	Description	No.	Description
1	Video and coaxial audio in	4	LAN network interface and USB interface
2	HDMI interface	5	Power supply
3	VGA interface	6	GND

## **Available Model**

DS-E04HGHI-D

**Headquarters**No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ









