


p.n.906876HU

RG59 B/U 2DC,0.58mm COPPER(100%), +3.75mm,
SPE+112x0.12mmCCA+2DC, 305M, Black, Wooden Drum

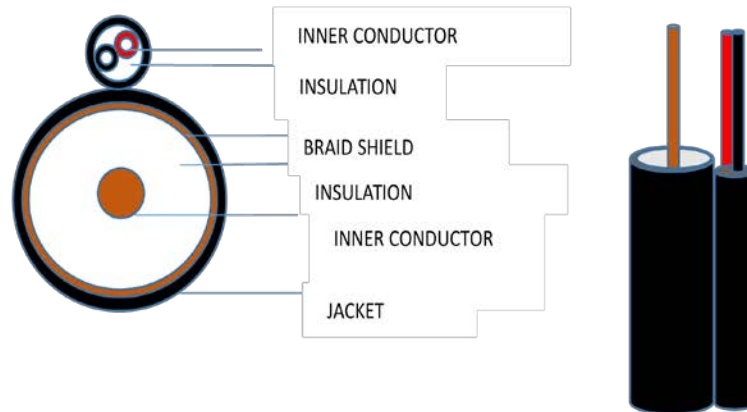

RG59+2Power combined cable for CCTV camera

RG59 coaxial cable specs:

Inner conductor: 0.584mm Bare Copper

Dielectric: 3.75mm Solid PE

Shield: 95%CCA wire braid

Outer jacket: 6.1mm PVC black 70°

2Power cable specs:

Conductor: 2*0.81mmCCA, 2*1.25mmPE,6.0+4.0mmPVC.

Features:

- 20 AWG Center Conductor, 95% braid, shielded 100% with PVC jacket
- Improved quality for video with heavy duty cable
- Greater signal reliability
- Indoor and outdoor use meeting all weather conditions
- Cable can be cut to exact length
- Works with twist-on, crimp-on, and compression BNC connectors
- Heavily shielded to minimize interference
- Power 18AWG Gauge
- Running "FT" count printed on cable makes measuring easy
- HD ready

RG59 is used for Security systems, Surveillance cameras, Satellite, Cable TV and Antenna installations.

It runs both video and power in just one cable and it is HD ready.

היצירה 19 רמלה 7255616 ת.ד. חולון 1869
טלפון 03-5575110 פקס. 03-5214524

office@telran.co.il

www.telran.co.il

