


High-end Entertainment Conference Loudspeaker

TS-608/TS-610/TS-612/TS-615

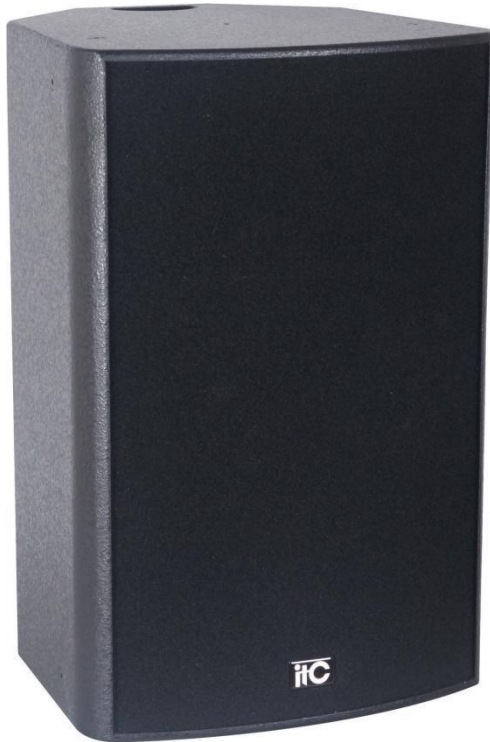

Product Description

* Using 1 pieces of 8"/10"/12"/15" mid-bass driver and 1 piece of 1.4"/1.4"/1.7"/1.73" Circular polyethylene diaphragm compression driver.

* Box is made of 15mm plywood, light quality, with wear resistant paint processing, and paste Anti-dust mesh cotton outside.

* The exact design of frequency divider is able to perfect power response and good performance of vocal part.

* A plurality of screw lifting holes, one pole socket whose diameter is 35mm, a variety of installation methods.

Scope Of Application

Used together with TS professional power amplifier and the former effect processor systems, it is

formed a set of perfect sound and vocal performance outstanding high-end entertainment

conference sound reinforcement system, which and be applied to the theater, KTV rooms, luxury meeting rooms and multi-function hall, etc. It can also be matched with subwoofer

high-performance satellite box.

Specifications

Model	TS-608	TS-610	TS-612	TS-615
Impedance	8 Ω	8 Ω	8 Ω	8 Ω
Frequency Response	60Hz~20KHz	55Hz~20KHz	50Hz~20KHz	45Hz~20KHz
Power Rating	200W	300W	350W	450W
Sensitivity	96dB/W/M	98dB/W/M	99dB/W/M	100dB/W/M
Coverage Angle	(H)80° (V)60°	(H)80° (V)60°	(H)80° (V)60°	(H)80° (V)60°
Tweeter	1.4" compression tweeter x 1	1.4"Compressed treble unit x 1	1.7"Compressed treble unit x 1	1.73"Compressed treble unit x 1
Bass	8" woofer x 1	10" x 1 Bass	12" x 1 Bass	15" x 1 Bass
Dimension	440 x 243 x 243 mm	510 x 325 x 300 mm	560 x 360 x 380mm	660 x 435 x 430 mm
Weight	9.6Kg	15.2Kg	19.2Kg	25.8Kg