


Mixer Amplifier (Phone Jack MIC Input)

T-350/T-550/T-650

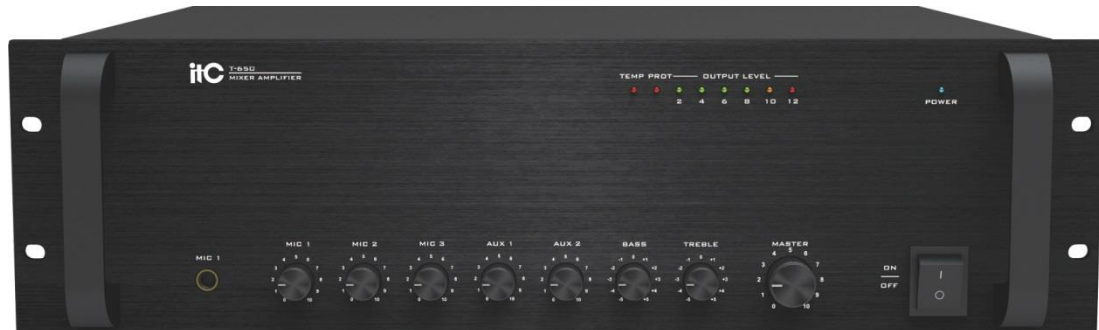

Descriptions

The basic public address mixer amplifiers have power ratings from 60W, 120W, 240W, 350W, 500W to 650W. They are featured of 3 microphone inputs, 2 aux inputs and 1 EMC input.

Priority muting is achieved via EMC for overriding other inputs except Mic1 on front panel.

Individual gain controls are provided for Mic 1-3 and Aux 1-2, bass and treble controls and

master volume control are provided for overall tone control. 70V, 100V and low impedance

4-16 Ω speaker outputs are provided. Extensive protection for short-circuit, overload

and high temp.

Features

- * Mixer amplifier for paging and background music system.
- * Rated power from 60W, 120W, 240W, 350W, 500W to 650W.
- * 2U rack mount (less than 350W) and 3U rack mount design.
- * 70V, 100V and low impedance 4-16 Ω speaker output.
- * Three Mic inputs by phone jack type.
- * Mic 1 with VOX priority and VOX level on front panel.
- * Mic 2-3 by phone jack on rear panel.
- * Two Aux Inputs and 2 line inputs for spare use.
- * One EMC priority input.
- * EMC has priority over all inputs except MIC1.
- * Mic 1-3, Aux 1-2 and master volume controls and bass/treble tone control.
- * Short circuit, overload and high temp protection.

Optional

- * DC 24V available on less than 500W models.
- * Panel with/without handhold.
- * Faults monitoring module, it can output short circuit signal to achieve main/spare amplifier switch.

Specifications

Model	T-350	T-550	T-650
Rated Power Output	350W	550W	650W
Speaker Outputs	70V, 100V & 4~16Ω		
Input Sensitivity & Impedance	MIC 1, 2, 3: 5mV/600Ω, Unbalanced phone jack input		
	MIC 2, 3: 775mV/10KΩ, Unbalanced RCA input		
	AUX 1, 2: 350mV/10KΩ, Unbalanced RCA input		
	EMC: 775mV/10KΩ, Unbalanced DG7.62 input		
Output Sensitivity & Impedance	MIX OUT: 1V/470Ω, Unbalanced RCA output		
Tone	Bass: ±10dB at 100Hz		
	Treble: ±10dB at 10KHz		
Frequency Response	50Hz~16KHz (+1dB, -3dB)		
S/N Ratio	MIC 1, 2, 3: 66dB, AUX 1, 2: 80dB		
THD	Less than 0.5% at 1KHz, 1/3 rated power		
Muting Function	MIC 1 overrides other input signals		
	with 0-30dB attenuation		
Crosstalk	≤50dB		
Cooling	Fan automatically starts up when temp reaches 55°C		
Protection	High temp, overload & short-circuit		

Power Supply	~110V-230V 50/60Hz		
Power Consumption	500W	750W	950W
Weight	13.96Kg	15.72Kg	17.8Kg
Dimensions	484 x 359 x 132mm		
Finish	Panel: aluminum plate, black Case: SPCC Panel		

Standard Series (Phone Jack MIC Input)

3U Rear Panel

