

# iFace1000

## Semi-Outdoor Multi-Biometric Time Attendance & Access Control Terminal



ZKTeco's newly released iFace1000 Semi-Outdoor Multi-Biometric Time Attendance & Access Control Terminal which supports 3,000 face templates, 4,000 fingerprint templates and 10,000 cards.


It is the first terminal equipped with high performance camera, which enables outdoor installation under the eaves.

It is also equipped with ZKTeco latest platform and algorithm, which provide clients with a brand new UI and user-friendly operating interface, bringing them a smooth user experience. With the advanced face algorithm and multi-biometric verification technology, the terminal's security level of verification is greatly enhanced.

---

### Features


- 3,000 face and 4,000 fingerprint templates
- Multi-languages
- High verification speed
- Optional built-in battery backup, providing approximately 4 hours of continuous operation
- One face template is registered for one user only
- Able to detect whether the face is an actual face or a photo, enhancing the security level of verification
- Outside installation (maximum 12,000 lux)

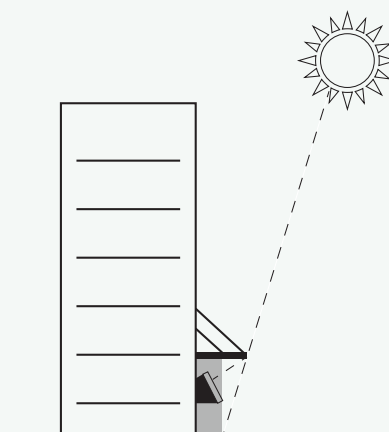


# Specifications

|                              |   |
|------------------------------|---|
| <b>Display</b>               | 4.3-Inch Touch Screen   |
| <b>Face capacity</b>         | 3,000 (1:N)   |
| <b>Fingerprint capacity</b>  | 4,000   |
| <b>ID Card capacity</b>      | 10,000 (Optional)   |
| <b>Logs capacity</b>         | 100,000   |
| <b>Communication</b>         | TCP/IP, RS232/485, USB Host   |
| <b>Standard Functions</b>    | Automatic Status Switch, Self-Service Query, Work Code, SMS<br>DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID, ADMS |
| <b>Interfaces for</b>        | 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm  |
| <b>Wiegand Signal</b>        | Output  |
| <b>Optional Functions</b>    | ID/IC/HID Card, Wi-Fi, 3G, 2000 mAH Backup Battery, External Bell and Printer   |
| <b>Power Supply</b>          | 12V 3A  |
| <b>Operating Temperature</b> | 0 °C- 45 °C   |
| <b>Operating Humidity</b>    | 20%-80%   |
| <b>Dimensions</b>            | 195.5*166.5*120mm (Length*Width*Thickness)  |
| <b>Package Weight</b>        | 1.6 kg  |

# Configuration

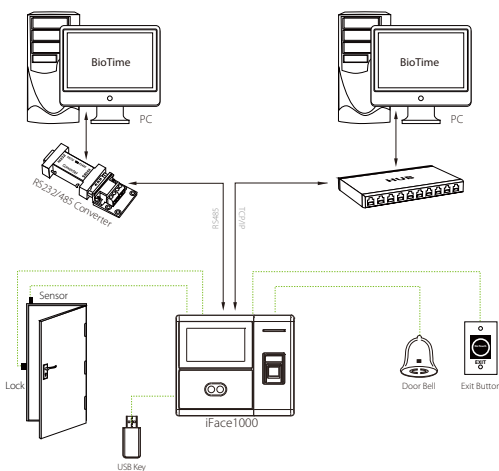

# What's in the Box

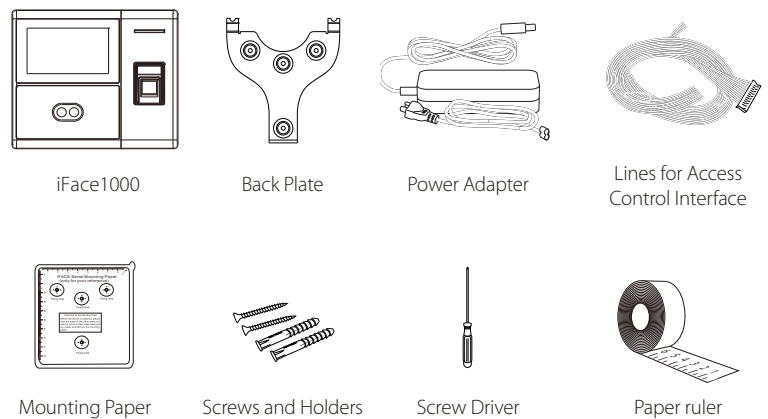

ZKTeco Middle East  
[www.zkteco.me](http://www.zkteco.me)  
 E-mail: [zk\\_me@zkteco.com](mailto:zk_me@zkteco.com)

© Copyright 2016.ZKTECO CO., LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

