



YLI ELECTRONIC



Plastic Surface Smokeproof Door Holder

Model:YD-607

Basic Instruction

24VDC(12/24VDC need order)

Emergency Release Button/Test Button

Wall Mounting Direction



Low Current Consumption

Reliable Fail-Safe Mechanism

Specifications

- Dimension: 75Lx90Wx35H(mm)
- Voltage: 24VDC
- Current draw: 70mA
- Surface temp: $\leq +20^{\circ}\text{C}$
- Optional: Manual door release button
- Suitable humidity: 0~90%(relative humidity)
- Weight: 0.82kg
- Holding force: 50kg(110Lbs)
- Suitable for: All Kinds of Single(Double) Smokeproof Door
- Finishes for shell: High Temperature Paint and Environmental Protection Zinc
- Finishes for armature: Chromium
- Cover material: ABS

Dimension

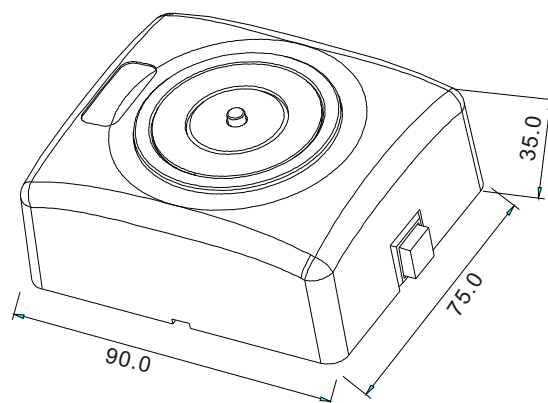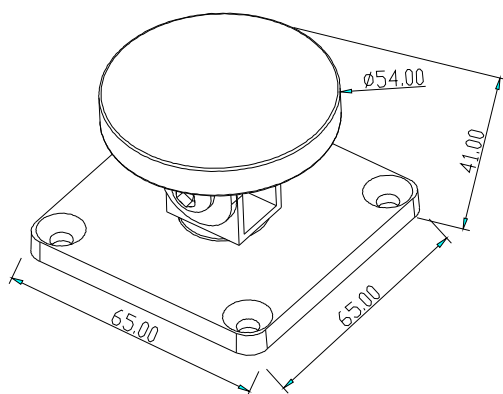

Installation

Remarks:

1. The default setting is 24VDC.
2. Red wire is +, black wire is -.
3. Release the red button by hand in emergency.

