



Descriptions

The basic public address mixer amplifiers have rated power ratings from 120W. They are 3 microphone inputs, 2 aux inputs and 1 EMC input. Priority muting is achieved via EMC for overriding other inputs except Mic1 on front panel. Individual gain controls are provided for Mic 1-3 and Aux 1-2, bass and treble controls and master volume control are provided for overall tone control. 70V, 100V and low impedance 4-16Ω speaker outputs are provided. Extensive protection for short-circuit, overload and high temp.


Features

- * Mixer amplifier for paging and background music system.
- * Rated power from 120W.
- * 2U rack mount design.
- * 70V, 100V and low impedance 4-16Ω speaker output.
- * Three Mic inputs by phone jack type.
- * Mic 1 with VOX priority and VOX level on front panel.
- * Mic 2-3 by phone jack on rear panel.
- * Two Aux Inputs and 2 line inputs for spare use.
- * One EMC priority input.
- * EMC has priority over all inputs except MIC1.
- * Mic 1-3, Aux 1-2 and master volume controls and bass/treble tone control.
- * Short circuit, overload and high temp protection.

Optional

- * DC 24V available on less than 500W models.
- * Panel with/without handhold.
- * Faults monitoring module, it can output short circuit signal to achieve main/spare amplifier switch.

2U Rear Panel

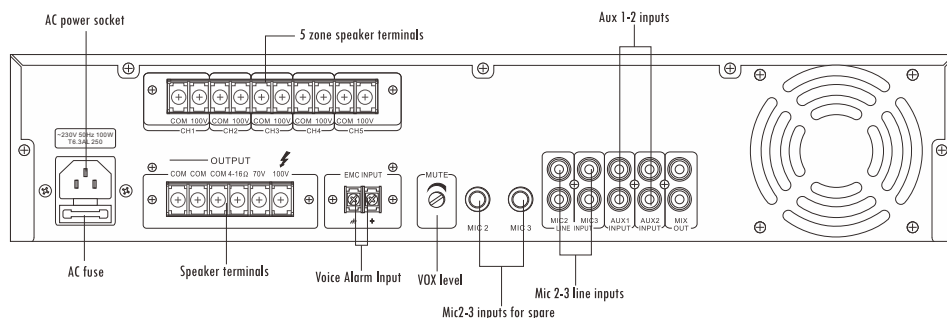

Specifications

Model	TI-120
Rated Power Output	120W
Speaker Outputs	70V, 100V & 4~16Ω
Input Sensitivity & Impedance	MIC 1, 2, 3: 5mV/600Ω, Unbalanced phone jack input MIC 2, 3: 775mV/10KΩ, Unbalanced RCA input AUX 1, 2: 350mV/10KΩ, Unbalanced RCA input EMC: 775mV/10KΩ, Unbalanced DG7.62 input
Output Sensitivity & Impedance	MIX OUT: 1V/470Ω, Unbalanced RCA output
Tone	Bass: ±10dB at 100Hz Treble: ±10dB at 10KHz
Frequency Response	50Hz~16KHz (+1dB, -3dB)
S/N Ratio	MIC 1, 2, 3: 66dB, AUX 1, 2: 80dB
THD	Less than 0.5% at 1KHz, 1/3 rated power
Muting Function	MIC 1 overrides other input signals with 0-30dB attenuation
Crosstalk	≤ 50dB
Cooling	Fan automatically starts up when temp reaches 55°C
Protection	High temp, overload & short-circuit
Power Supply	~110V-230V 50/60Hz
Power Consumption	200W
Weight	9.3Kg
Dimensions	484 x 303 x 88mm
Finish	Panel: aluminum plate, black Case: SPCC Panel